

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 November 2003 (06.11.2003)

PCT

(10) International Publication Number
WO 03/091545 A1

(51) International Patent Classification⁷: F01C 1/344,
21/08

(21) International Application Number: PCT/FI03/00314

(22) International Filing Date: 17 April 2003 (17.04.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20020793 24 April 2002 (24.04.2002) FI

(71) Applicant and

(72) Inventor: VIITAMÄKI, Tapio [FI/FI]; Lipastinkuja 12,
FIN-61330 Koskenkorva (FI).

(74) Agent: KOLSTER OY AB; Iso Roobertinkatu 23, P.O.
Box 148, FIN-00121 Helsinki (FI).


(81) Designated States (*national*): AE, AG, AL, AM, AT (util-
ity model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,

CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (util-
ity model), DE, DK (utility model), DK, DM, DZ, EC, EE
(utility model), EE, ES, FI (utility model), FI, GB, GD, GE,
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ,
LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,
MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU,
SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO utility model (GH),
ARIPO patent (GH), ARIPO utility model (GM), ARIPO
patent (GM), ARIPO utility model (KE), ARIPO patent
(KE), ARIPO utility model (LS), ARIPO patent (LS),
ARIPO utility model (MW), ARIPO patent (MW), ARIPO
utility model (MZ), ARIPO patent (MZ), ARIPO utility
model (SD), ARIPO patent (SD), ARIPO utility model
(SL), ARIPO patent (SL), ARIPO utility model (SZ),
ARIPO patent (SZ), ARIPO utility model (TZ), ARIPO
patent (TZ), ARIPO utility model (UG), ARIPO patent
(UG), ARIPO utility model (ZM), ARIPO patent (ZM),
ARIPO utility model (ZW), ARIPO patent (ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES,
FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI,

[Continued on next page]

(54) Title: HYDRAULIC MOTOR

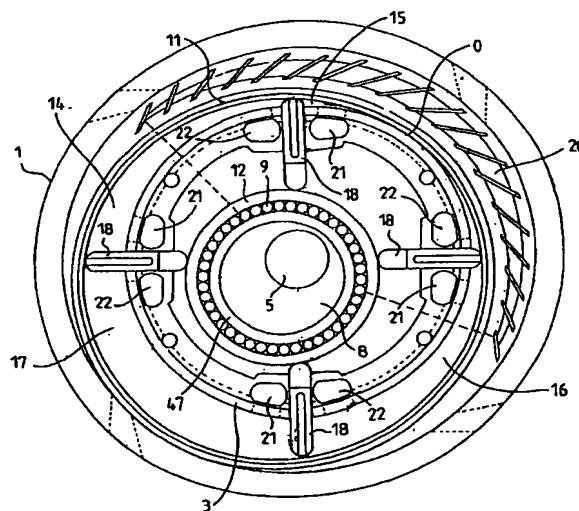

(57) Abstract: The invention relates to a hydraulic motor having an outer casing (1) and eccentric means (11, 12, 8) for rotating a power shaft (5) by means of fluid through a pressure chamber arrangement (14 to 17). The eccentric means comprise an eccentric part (8) formed in the power shaft (5), a first eccentric ring (11) between the outer casing (1) and an inner casing (3), and a second eccentric ring (12) mounted with bearings around the eccentric part and connected fixedly and concentrically to the first eccentric ring, whereby the pressure chamber arrangement is located between the first eccentric ring and the inner casing so that the first eccentric ring drives the power shaft through the second eccentric ring (12), and the eccentric rings (11, 12) form a substantially non-rotating entity that only performs an eccentric movement and by means of this eccentric movement rotates the power shaft.

Best Available Copy



SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian*

patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- *of inventorship (Rule 4.17(iv)) for US only*

Published:

- *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

HYDRAULIC MOTOR

BACKGROUND OF THE INVENTION

[0001] The invention relates to a hydraulic motor having a non-rotating annular outer casing, moving eccentric means inside the outer casing, a power shaft connected to the eccentric means and rotatable thereby, a pressure chamber arrangement communicating with the eccentric means for moving the eccentric means and thus rotating the power shaft by means of hydraulic fluid, steam or pressurized air led into and removed from the pressure chamber arrangement, and a non-rotating annular inner casing inside the non-rotating annular outer casing.

[0002] In principle, hydraulic motors are the opposite of hydraulic pumps. They change hydraulic energy back to mechanical energy. In structure, hydraulic motors greatly resemble pumps and sometimes it is possible to use a hydraulic pump as a motor and vice versa. The matter should, however, be checked with the manufacturer of the pump or motor. Hydraulic motors work like pumps, i.e. using the displacement principle. The motors are controlled in an open hydraulic system by 4-way valves or a closed hydraulic system is used. In many cases, the motor can be made rotate in both directions. High torques and outlets with respect to their size characterize hydraulic motors. The start-up torques are 80 to 99% of the rated torque. The motors are well suited for demanding conditions, because the hydraulic system is tight and the heat generated in the motor is transmitted with a medium to a container. Hydraulic motors often have a separate leak connection that is connected to the container. The motors are either slow-speed 0 to 500 r/min (high torque) or high-speed 1,000 to 4,000 r/min (low torque). The most common hydraulic motor types are: gear motor, vane motor and piston motor.

[0003] This invention relates to vane motors. In known vane motors, a non-rotating stator forms the outer circumference of the motor. Inside the stator, there is a round chamber mounted with an eccentric rotor. The rotor has vanes at regular intervals that are sealed against the inner ring of the stator forming chambers between the stator and rotor. Pressurized hydraulic fluid is fed from one side of the stator to these chambers and correspondingly, the hydraulic fluid is removed from the other side of the stator, whereby the rotor is made to rotate. Known vane motors can be constant or adjustable in displacement. The adjustment is done by altering the eccentricity of the rotor. At

low speeds of rotation, the pushing out of the vanes is ensured by means of springs. Vane motors are generally high-speed motors. Slowly rotating high-torque motors have also been constructed of them by increasing the rotor width by increasing the diameter and by adding pressure chambers, whereby
5 the displacement can be increased.

[0004] Drawbacks with this and all other prior-art hydraulic motors include friction and wear problems of the rotating parts and the limited rotating rate, outlet and torque caused by this.

BRIEF DESCRIPTION OF THE INVENTION

10 [0005] It is an object of the invention to develop by using a vane motor as the starting point a completely new type of hydraulic motor, in which the above drawbacks can be entirely eliminated. This object is achieved by a hydraulic motor of the invention and of the type described in the beginning that is characterized in that the eccentric means comprise an eccentric part formed
15 in the power shaft, a first eccentric ring between the outer casing and the inner casing, and a second eccentric ring mounted with bearings around the eccentric part of the power shaft and connected fixedly and concentrically to the first eccentric ring, whereby the pressure chamber arrangement is located between the first eccentric ring and the inner casing in such a manner that the first eccentric ring drives the power shaft through the second eccentric ring and the
20 first and second eccentric rings form a substantially non-rotating entity that only performs an eccentric movement and makes the power shaft rotate by means of this eccentric movement.

[0006] The invention is thus based on an eccentric ring that drives a
25 power shaft, does not rotate, but only performs an eccentric movement. The only rotating part is the above-mentioned power shaft with any possible balancing elements.

[0007] The considerable advantages provided by the solution of the invention are naturally the elimination of all the earlier problems causing wear-
30 ing. The structure is also extremely simple in other respects, and a physically small motor can also generate significantly high outlets and torques. The rotating rate of the power shaft also does not have the same limitations as the limitations for the rotation of the rotor in the prior-art vane motors.

LIST OF FIGURES

[0008] The invention will now be described in greater detail by means of a preferred embodiment and with reference to the attached drawings, in which

5 Figure 1 shows the cross-section or radial section of a hydraulic motor of the invention,

 Figure 2 shows the longitudinal or axial section of a hydraulic motor of Figure 1,

10 Figure 3 shows the hydraulic motor of the previous figures as an exploded view, and with reference to Figures 1 to 3:

 Figure 4 shows the inner casing of the motor,

 Figure 5 is an end view of a feeding apparatus of the motor,

 Figure 6 is a sectional view of the feeding apparatus of the motor,

 Figures 7 to 10 show a few embodiments of a divider of the motor,

15 Figure 11 shows the operation of a centre adjuster of the motor,

 Figure 12 shows the centre adjuster from one end,

 Figure 13 is a sectional view of the centre adjuster,

 Figures 14 to 17 show the different stages of the operation of the motor.

20 DETAILED DESCRIPTION OF THE INVENTION

 [0009] The hydraulic motor shown in Figures 1 to 3 has a non-rotating cylindrical outer casing 1 which is closed at one end with a first end plate 2, and a non-rotating inner casing 3 that is through a second end plate 4 located at one end thereof connected to one end of the outer casing 1. These
25 components 1 to 4 primarily form the outermost parts of the motor.

 [0010] The components 1 to 4 enclose firstly a power shaft 5 arranged inside the inner casing 3 and mounted with bearings 6 and 7 in relation to its centre line A coaxially in relation to the inner casing 3 to the end plates 2 and 4. The power shaft 5 has an eccentric part 8 that is essential for the operation of the motor and has a bearing 9 mounted on its surface. Said components 1 to 4 also enclose an eccentric ring arrangement 10 that is also essential for the operation of the motor and comprises a first cylindrical eccentric ring 11 arranged between the outer casing 1 and the inner casing 3, and a second cylindrical eccentric ring 12 that is mounted on the eccentric part 8 of the
30

power shaft 5 with the above-mentioned bearing 9. The eccentric rings 11 and 12 are coaxial and connected to each other at one end with an end ring 13.

[0011] The eccentric ring arrangement 10 is substantially a non-rotating entity that only performs an eccentric movement and by means of the
5 eccentric movement rotates the power shaft 5.

[0012] To drive the eccentric ring 11, a pressure chamber arrangement 14 to 17 is arranged between it and the inner casing for leading hydraulic fluid, steam or pressurized air thereto. In the following, the term hydraulic fluid is used, but the 'fluid' can also be steam or pressurized air depending on the
10 application of the hydraulic motor. In this example, the pressure chamber arrangement is divided into four equal-sized parts 14 to 17 and this is done specifically by means of divider means 18 arranged through the inner casing 3 that are arranged in close contact with the inner surface of the driving eccentric ring 11 and the outer surface of the second eccentric ring 12 and to move radially
15 in relation to the inner casing 3 guided by the eccentric rings 11 and 12 when the eccentric ring arrangement 10 performs its eccentric movement.

[0013] The operation of the motor is simply such that hydraulic fluid is fed between the eccentric ring 11 and inner casing 3, i.e. spaces 14 to 17 and specifically when their volumes are at their smallest, whereby said spaces
20 begin to expand and the eccentric movement progresses in such a manner that the eccentric ring 11 pushes towards the outer casing 1 and the eccentric movement of the eccentric ring 11 progresses between the inner and outer casings 1 and 3. This eccentric movement is such that the contact points of the eccentric ring 11 with the casings 1 and 3 progress along the surfaces of the
25 casings 1 and 3 in the rotating direction of the power shaft 5. That is, said contact points 'rotate', but the eccentric ring 11 does not rotate. This movement of the eccentric ring 11 in turn rotates (forces to rotate) the power shaft 5 by means of the second eccentric ring 12 mounted with bearings on the eccentric part 8 of the power shaft 5. The bearing 9 makes sure that the eccentric rings
30 11 and 12 do not rotate. This operation is described later in greater detail.

[0014] To balance the eccentric forces, a balancing arc 20 fastened through a flange 19 to the power shaft 5 is arranged between the outer casing 1 and the driving eccentric ring 11 at a distance from their surfaces, the arc being located on the opposite side of the power shaft 5 in relation to the eccentric
35 part 8 of the power shaft 5. This arrangement makes sure that the arc 20 never touches the eccentric ring 11. By suitably dimensioning the mass of the

balancing arc 20, the vibration caused by the eccentric movement can be eliminated.

[0015] The feeding arrangement of hydraulic fluid comprises intake channels 21 and outlet channels 22 arranged to the inner casing 3. The intake channels 21 open into the chambers 14 to 17 in the direction of travel of the eccentric ring 11 or in the rotating direction of the power shaft 5 when seen immediately after each divider means 18, and the outlet channels 22 immediately before the divider means 18. Both the intake and outlet channels 21 and 22 can open into the chambers 14 to 17 as several, preferably parallel openings 23 and 24, as shown in Figure 4.

[0016] In Figures 5 and 6 in particular, to open and close the intake and outlet channels 21 and 22 of the feeding arrangement of hydraulic fluid and to feed hydraulic fluid into the intake channels 21 and discharge hydraulic fluid through the outlet channels 22 in a synchronized manner, a feeding apparatus 25 is fastened to the end plate 4 of the inner casing 3, and the channels 21 and 22 of the inner casing "continue" in the body 26 of the feeding apparatus as channels 21a and 22a and connect to a synchronizing drum 27 arranged rotatably inside the body 26 and receiving its driving power from the power shaft 5 and opens and closes the channels 21a and 22a by means of shaped 180-degrees long grooves 28 and 29 and 180-degrees long ring sections 30 and 31 between them in the synchronizing drum 27 in the order required by the operation of the motor. Between the feeding apparatus 25 body 26 and the synchronizing drum 27, there are ring channels 32 and 33 connected to the parts 28 to 31 and guided by the rotation of the synchronizing drum 27, the ring channels are connected to the intake and outlet channels 34 and 35 of hydraulic fluid that are connected to the hydraulic aggregate. When the synchronizing drum 27 rotates, the channels 34 and 35 are alternately connected to the channels 21a and 22a and correspondingly to channels 21 and 22 for the time required for intake and outlet stages. The operation of the synchronizing apparatus 25 is described in greater detail later in connection with the description of the operation of the following motor.

[0017] The feeding apparatus according to Figures 5 and 6 is designed to be simple and inexpensive to manufacture, but the motor does run with other types of feeding apparatuses, too. The feeding apparatus does not necessarily need to be mechanically operated, i.e. it can also be made up of

pressure-controlled magnetic valves that operate on pulses received from the power shaft 5. This structure would be expensive, but possible, to build.

[0018] The divider means 18 is preferably made up of two main parts 36 and 37 that are connected to each other by means of pins 38. The pins 38 can slide in the parts 36 and 37, and springs 39 are arranged around the pins 38 between the parts 36 and 37 to distance the parts 36 and 37 from each other so as to make them press flexibly but tightly against the surfaces of the eccentric rings 11 and 12. In addition, the ends of the divider means 18 that touch said surfaces are rounded, especially due to the path of the eccentric ring 11. Figures 1 to 3 and 7 show an embodiment of such a simple divider means 18.

[0019] Figure 8 shows a further development of the divider means 18 described above, in which the contact point 40 on the side of the eccentric ring 11 is a separate piece that is also forced outward by means of second springs 41. In addition, the edges 42 touching the side walls of the pressure chambers 14 to 17 are separate parts that are in turn forced towards the side by means of springs 43.

[0020] The sealing of the divider means 18 against the counter-surfaces can also be done hydraulically according to Figure 11. In it, all spring forces described above can be replaced by oil pressure in an oil channel arrangement 44, for instance by leading oil in through a channel 45 and out through a channel 46. The springs 39, 41 and 43 described above or some of them can also be kept in addition to this hydraulic action to obtain a tight sealing even at the start-up time of the motor when the oil pressure has not risen sufficiently.

[0021] According to Figure 10, a turning end 46 may be arranged to the divider means 18 against the surface of the eccentric element 11. The end 46 turns according to the path of the eccentric element 11 and guided by it. Owing to the larger contact surface of the eccentric element 11 and head 46, sealing is improved and lubrication facilitated, because the entire contact surface of the end 46 is always in contact with the inner surface of the eccentric element 11. Wearing is slight, because there is practically no relative sliding movement between said surfaces.

[0022] A centre adjuster 47 of the eccentric arrangement 11, 12 shown especially in Figures 11 to 13 is preferably arranged between the eccentric part 8 and bearing 9 of the power shaft 5 to maintain a constant contact

point between the inner casing 3 and eccentric ring 11. In this example, the adjusting system has a spring seat 49 in the side flange 48 of the centre adjuster 47, a spring seat 50 at the end of the inner casing 3 and a spring 51 between them, and the spring 51 pushes the centre adjuster 47 forward on the eccentric part 8 making the eccentric ring 11 press against the inner casing 5. There are preferably two of these systems 49 to 51, as shown in Figures 11 to 13. The rotating rate of the adjuster 47 is naturally the same as that of the power shaft 5, because they are connected to each other. The end of the inner casing 3 has locking pins 52 that work together with locking openings 53 of the side flange 48 of the adjuster 47 and prevent the eccentric ring 11 from "opening" in relation to the inner ring 3. When the pin 52 is at the front edge of the locking opening 53 with respect to the rotating direction of the power shaft 5, the above-mentioned contact point remains constant.

[0023] The eccentricity of the centre adjuster 47 is small, which is why the force of the springs 51 toward the eccentric ring 11 is considerable. A small eccentricity of the centre adjuster 47 is preferable, since the force of the hydraulic fluid produces only a small load to it. Alternatives based on for instance hydraulic or centrifugal forces or combinations thereof can naturally be found for the technical implementation of this adjusting system.

[0024] With reference to Figures 14 to 17, the hydraulic motor described above works as follows.

[0025] In Figure 14b, the intake channel 21 of the upper left chamber 14 is open and the outlet channel 22 is closed, i.e. hydraulic fluid flows into the chamber 14 and the chamber 14 is thus at a pressure stage. The intake channel 21 of the upper right chamber 15 is open and the outlet channel 22 is closing, i.e. the chamber 15 is at a change stage, in which hydraulic fluid has flown out of the chamber 15 and hydraulic fluid will soon begin to flow into it again. The intake channel of the lower right chamber 16 is closed and the outlet channel 22 is open, i.e. the chamber 16 is at the discharge stage of hydraulic fluid. The intake channel 21 of the lower left chamber 17 is closing and the outlet channel 22 will open in a while, i.e. the chamber 17 is at the end of the pressure stage.

[0026] In Figure 15b, the intake channel 21 of the upper right chamber 15 is open and the outlet channel 22 is closed, i.e. hydraulic fluid flows into the chamber 15 and the chamber 15 is thus at a pressure stage. The intake channel 21 of the lower right chamber 16 is open and the outlet channel

22 is closing, i.e. the chamber 16 is at a change stage, in which hydraulic fluid has flown out of the chamber 16 and hydraulic fluid will soon begin to flow into it again. The intake channel of the lower left chamber 17 is closed and the outlet channel 22 is open, i.e. the chamber 17 is at the discharge stage of hydraulic fluid. The intake channel 21 of the upper left chamber 14 is closing and the outlet channel 22 will open in a while, i.e. the chamber 17 is at the end of the pressure stage.

[0027] In Figure 16b, the intake channel 21 of the lower right chamber 16 is open and the outlet channel 22 is closed, i.e. hydraulic fluid flows into the chamber 16 and the chamber 16 is thus at a pressure stage. The intake channel 21 of the lower left chamber 17 is open and the outlet channel 21 is closing, i.e. the chamber 17 is at a change stage, in which hydraulic fluid has flown out of the chamber 17 and hydraulic fluid will soon begin to flow into it again. The intake channel of the upper left chamber 14 is closed and the outlet channel 22 is open, i.e. the chamber 14 is at the discharge stage of hydraulic fluid. The intake channel 21 of the upper right chamber 15 is closing and the outlet channel 22 will open in a while, i.e. the chamber 15 is at the end of the pressure stage.

[0028] In Figure 17b, the intake channel 21 of the lower left chamber 17 is open and the outlet channel 22 is closed, i.e. hydraulic fluid flows into the chamber 17 and the chamber 17 is thus at a pressure stage. The intake channel 21 of the upper left chamber 14 is open and the outlet channel 21 is closing, i.e. the chamber 14 is at a change stage, in which hydraulic fluid has flown out of the chamber 14 and hydraulic fluid will soon begin to flow into it again. The intake channel 21 of the upper right chamber 15 is closed and the outlet channel 22 is open, i.e. the chamber 15 is at the discharge stage of hydraulic fluid. The intake channel 21 of the lower right chamber 16 is closing and the outlet channel 22 will open in a while, i.e. the chamber 16 is at the end of the pressure stage.

[0029] This way, the hydraulic motor of the invention has performed one work cycle and the stages of another work cycle will begin again from the stage according to Figure 14b.

[0030] Figures 14a to 17a in turn describe, how the ring parts 30 and 31 of the synchronizing drum 27 of the feeding apparatus 25 close and open the channels 21a and 22a of the feeding apparatus leading to the intake

and outlet openings 21 and 22 of the motor in accordance with the stages shown in Figures 14b to 17b.

5 [0031] An intake and outlet line (or pressure and return line) 21, 21a and 22, 22a thus leads to every pressure chamber 14 to 17 and the lines are divided in such a manner that during a working stage, the outlet line 22, 22a is closed with the exception of the start of the pressure stage, during which both the intake and the outlet lines 21, 21a and 22, 22a are open so that a counter pressure cannot be generated on the other side of the 0 point, where a discharge stage is ongoing at this time.

10 [0032] Pressure is fed to the pressure chamber 14 to 17 when its volume is at its smallest and the chamber 14 to 17 begins to expand and thus take the eccentric ring 12 towards its maximum value, at which its axis angle is perpendicular to the pressure chamber 14 to 17, i.e. the chamber 14 to 17 is at its maximum size. Next, the intake line 21, 21a closes and the return line 22, 15 22a opens. The pressure stage of the neighbouring chamber 14 to 17 again rotates the eccentric ring 12 towards its maximum value, in which case the volume of the previous chamber 14 to 17 decreases and oil is forced to exit from the chamber 14 to 17. The pressure stages follow a linearly rotating movement. The rotating direction of the motor can, if desired, be changed, in which 20 case the intake line 21, 21a is changed to the outlet line and the outlet line 22, 22a to the intake line, i.e. the hydraulic fluid is rotated in the reverse direction.

25 [0033] The above description of the invention is only intended to illustrate the basic idea of the invention. It is, however, apparent to a person skilled in the art that this basic idea can be implemented in many different ways. Thus the invention and its embodiments are not limited to the examples described above, but they and their details may vary considerably within the scope of the attached claims. Thus, the number of pressure chambers, for instance, is not limited to the four mentioned in the example case, but there may be two or more, as necessary in each case. It is also possible to use the motor 30 of the invention as a pump.

CLAIMS

1. A hydraulic motor having
- a non-rotating annular outer casing (1),
 - moving eccentric means (11, 12, 8) inside the outer casing,
 - 5 - a power shaft (5) connected to the eccentric means and rotatable thereby,
 - a pressure chamber arrangement (14 to 17) communicating with the eccentric means for moving the eccentric means and thus rotating the power shaft (5) by means of hydraulic fluid, steam or pressurized air led into
 - 10 and removed from the pressure chamber arrangement, and
 - a non-rotating annular inner casing (3) inside the non-rotating annular outer casing (1),
- characterized** in that
- the eccentric means comprise an eccentric part (8) formed in the
 - 15 power shaft (5), a first eccentric ring (11) between the outer casing (1) and the inner casing (3), and a second eccentric ring (12) mounted with bearings around the eccentric part of the power shaft and connected fixedly and concentrically to the first eccentric ring, whereby
 - the pressure chamber arrangement (14 to 17) is located between
 - 20 the first eccentric ring (11) and the inner casing (3) in such a manner that the first eccentric ring drives the power shaft (5) through the second eccentric ring, and
 - the first and second eccentric rings (11, 12) form a substantially non-rotating entity that only performs an eccentric movement and makes the
 - 25 power shaft (5) rotate by means of this eccentric movement.
2. A hydraulic motor as claimed in claim 1, **characterized** in that the pressure chamber arrangement (14 to 17) is divided into at least two equal-sized parts by means of divider means (18) arranged through the inner casing (3) and arranged to be in close contact with the inner surface of the first
- 30 eccentric ring (11) and the outer surface of the second eccentric ring (12) and to move radially in relation to the inner casing guided by the eccentric rings.
3. A hydraulic motor as claimed in claim 1 or 2, **characterized** in that to balance the eccentric forces, a balancing arc (20) fastened to the power shaft (5) is arranged between the outer casing (1) and the eccentric

ring (11), the arc (20) being located on the opposite side of the power shaft (5) in relation to the eccentric part (8) of the power shaft.

4. A hydraulic motor as claimed in any one of the preceding claims, **characterized** in that intake and outlet channels (21, 22) are arranged
5 to the inner casing (3) for leading hydraulic fluid, steam or pressurized air to the pressure chamber arrangement (14 to 17) and away from it.

5. A hydraulic motor as claimed in claim 4, **characterized** in that a feeding apparatus (25) connected to the intake and outlet channels (21, 22) is fastened to the side of the motor to rotate hydraulic fluid, steam or pres-
10 surized air through the pressure chamber arrangement (14 to 17).

6. A hydraulic motor as claimed in claim 5, **characterized** in that the feeding apparatus (25) is a mechanical rotating valve.

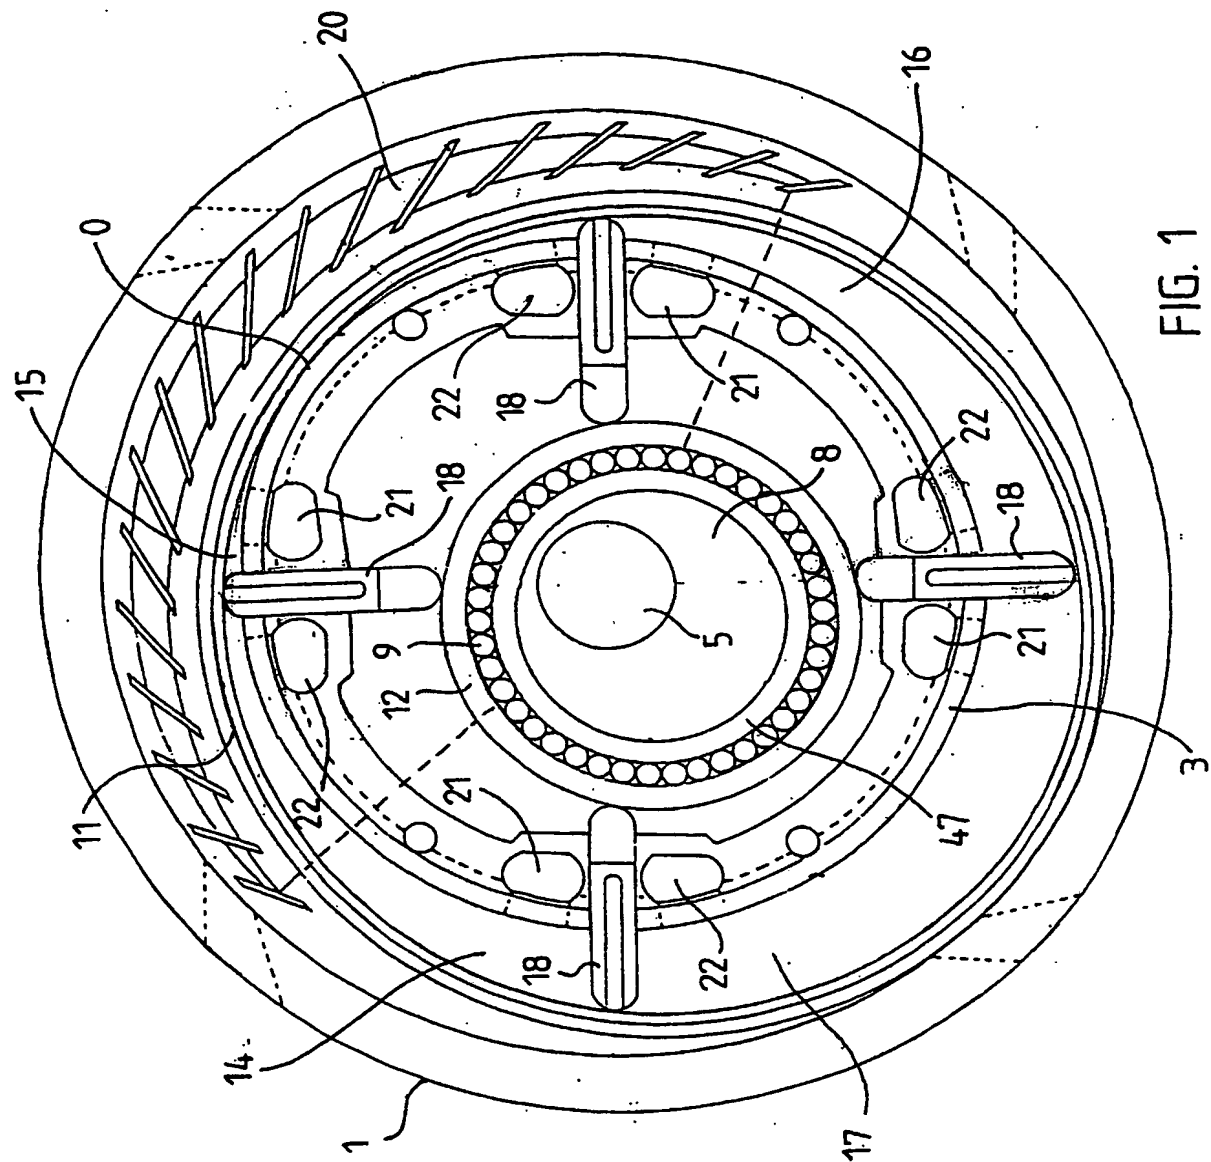


FIG. 1

2/11

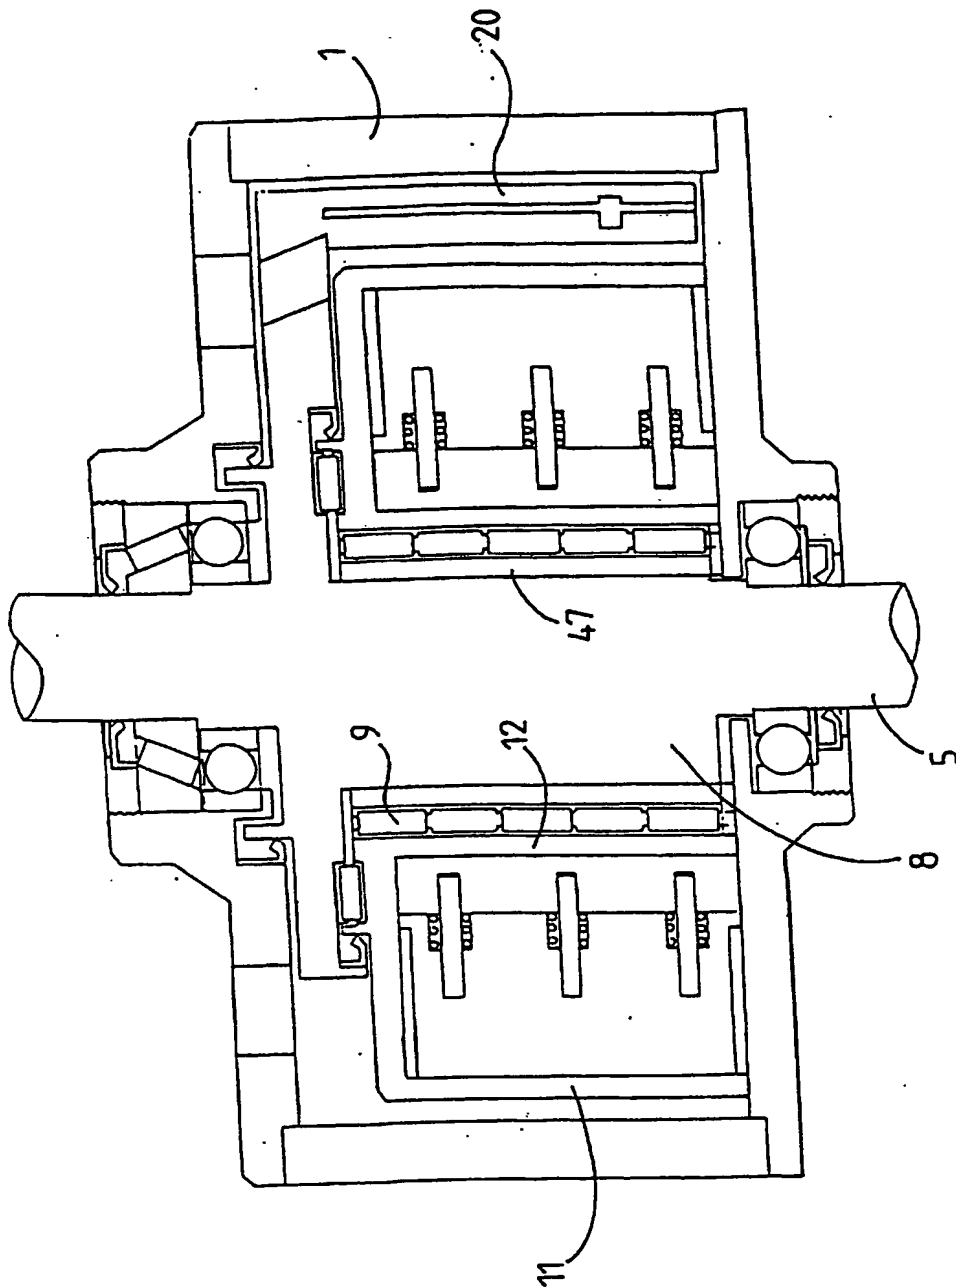
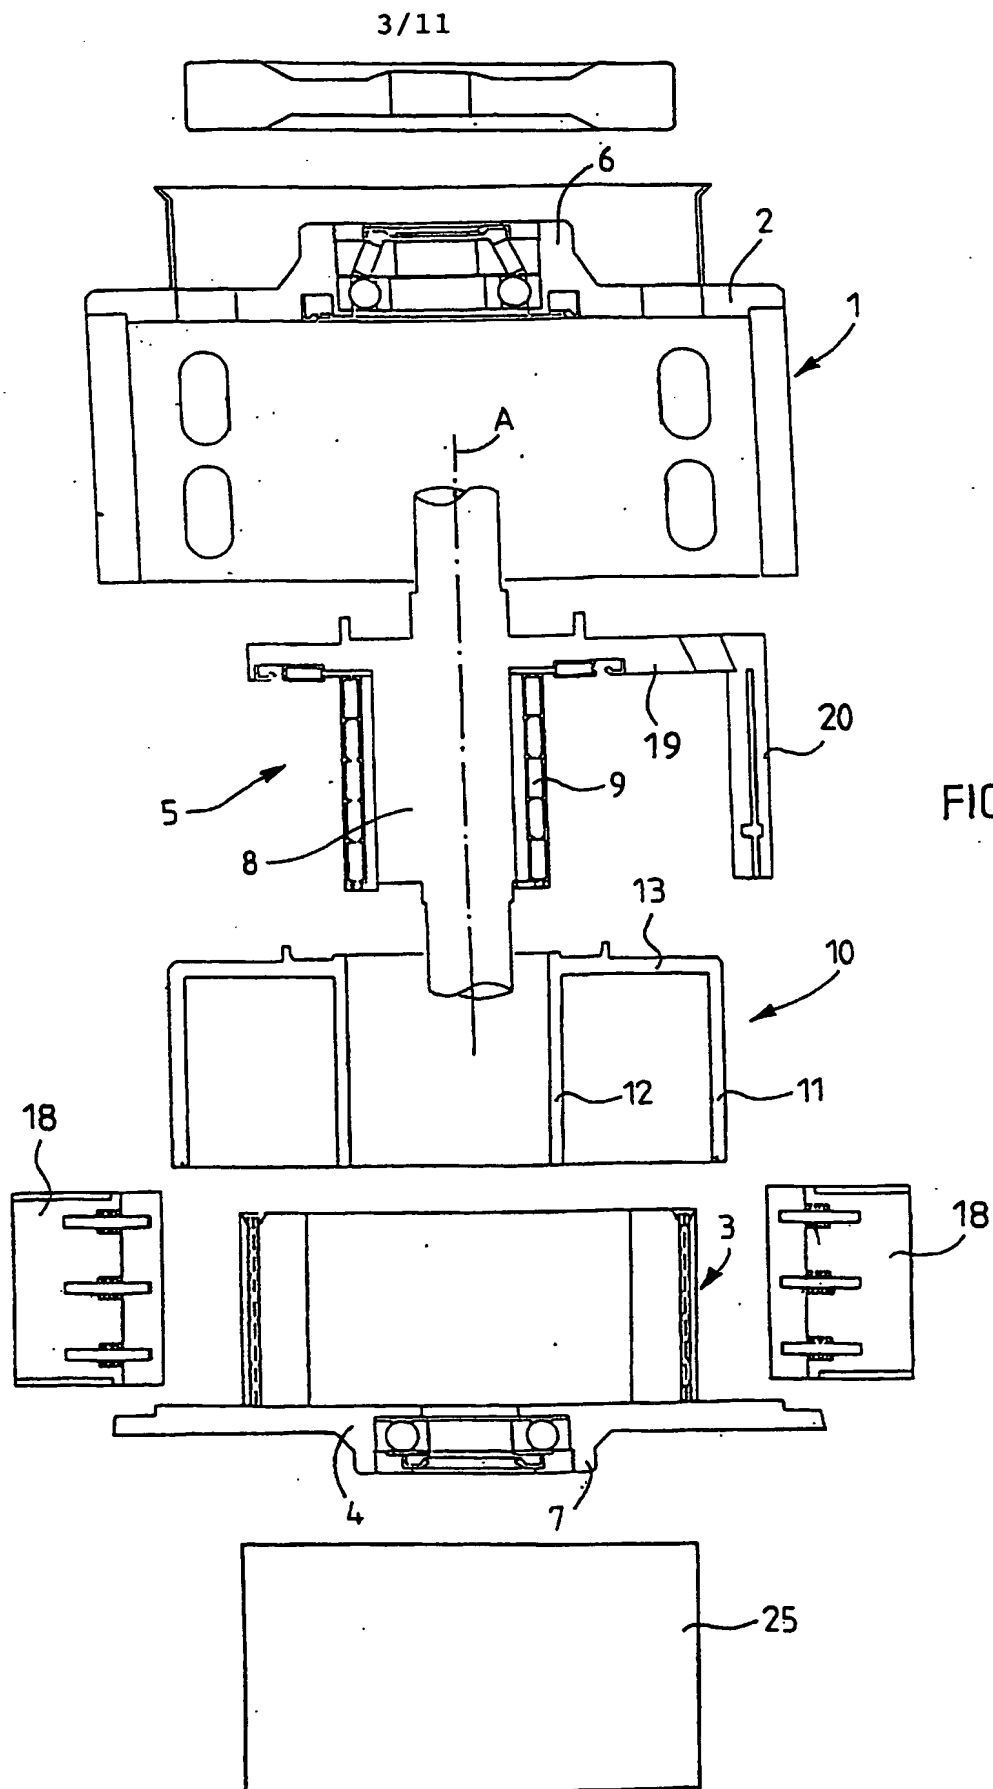


FIG. 2



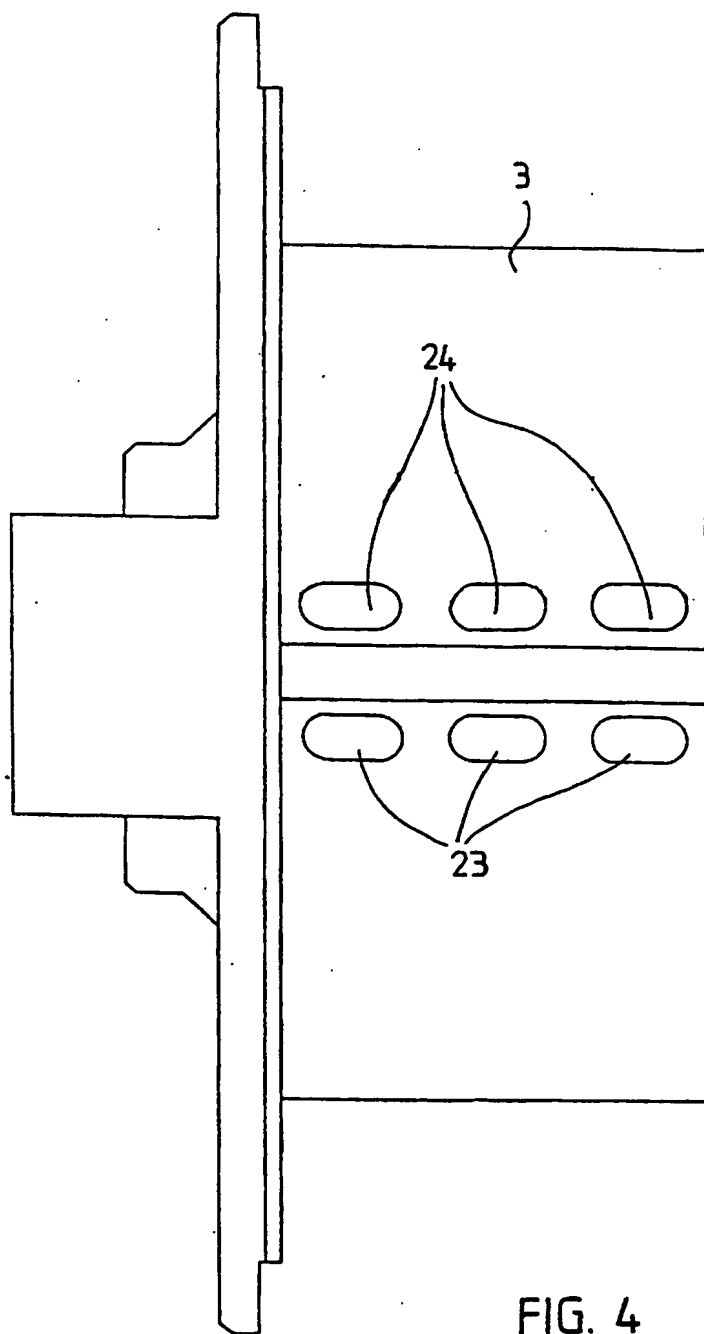


FIG. 4

5/11

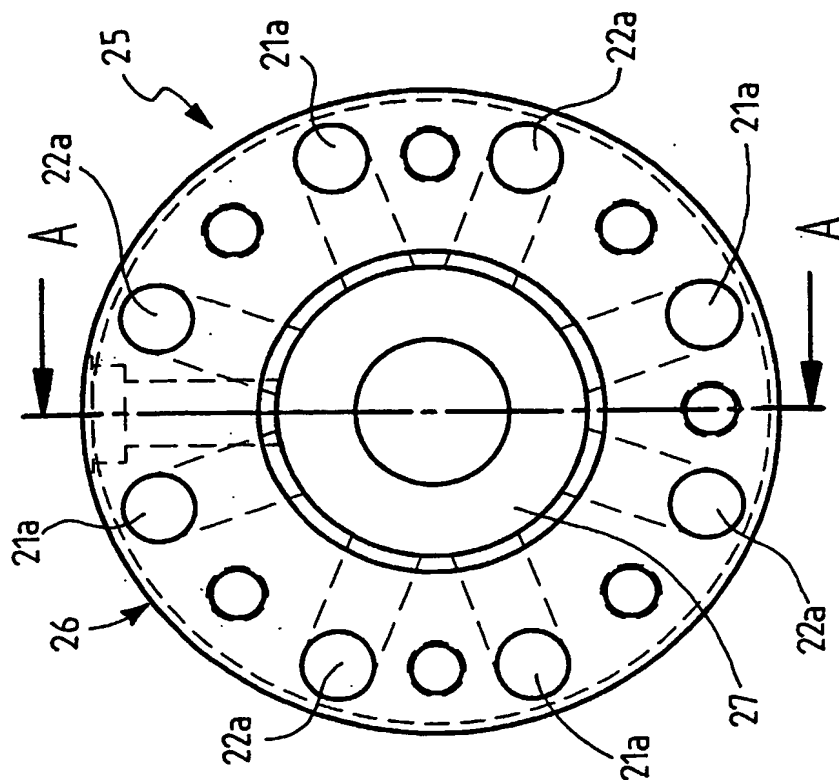


FIG. 5








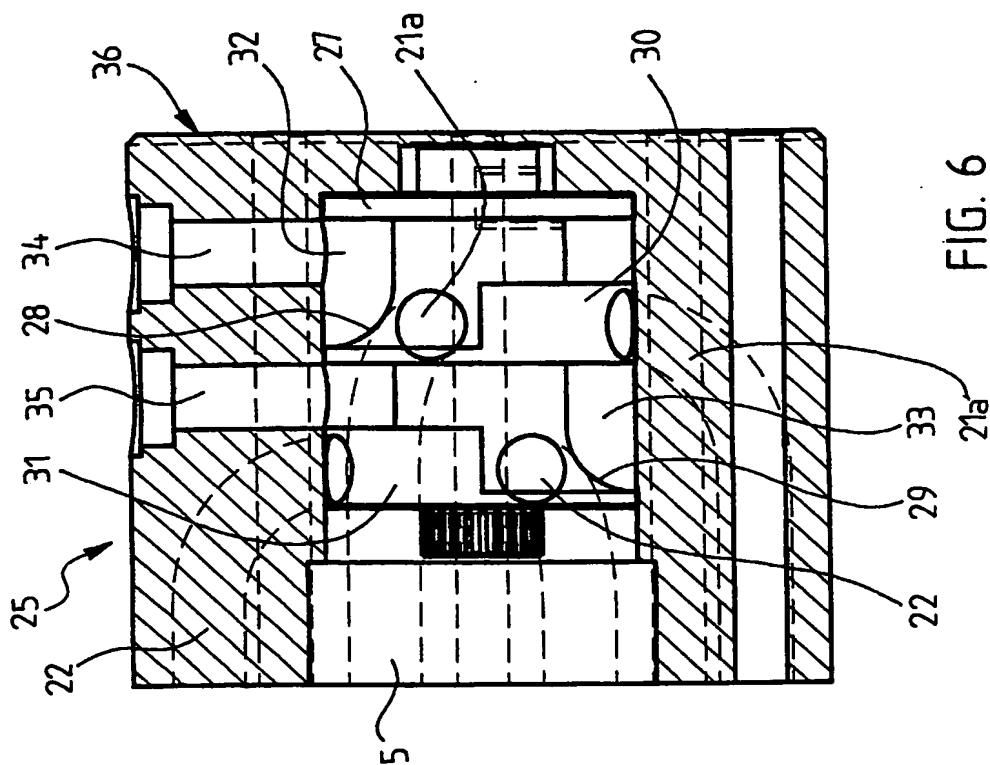


FIG. 6

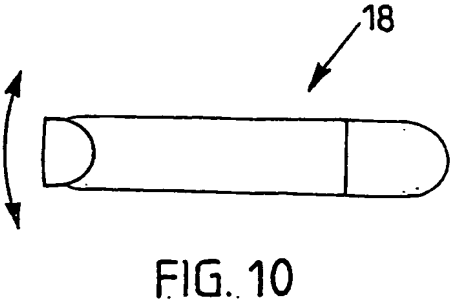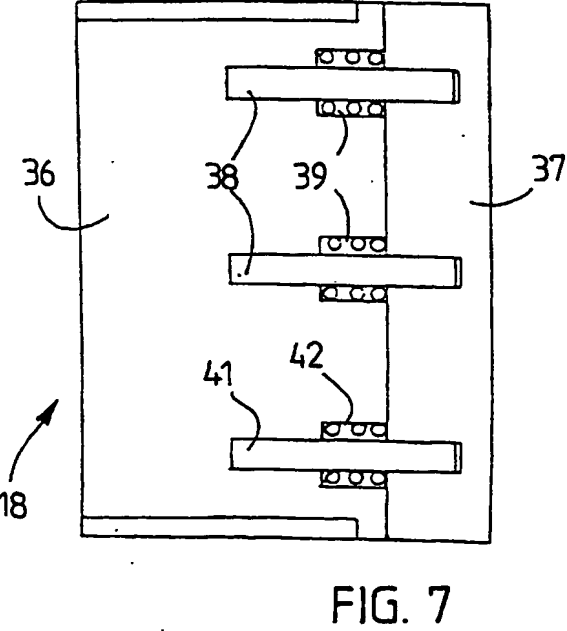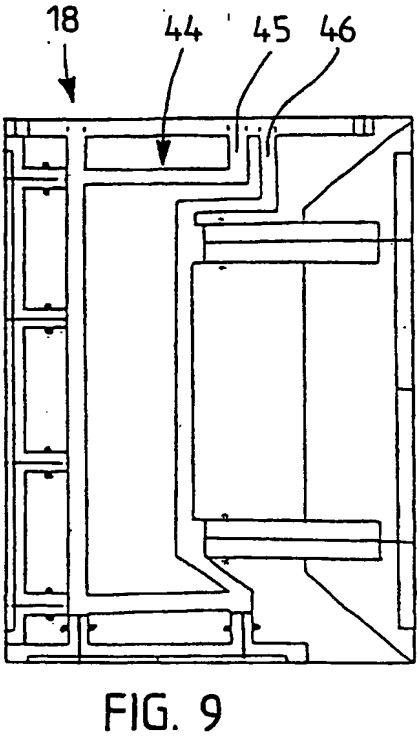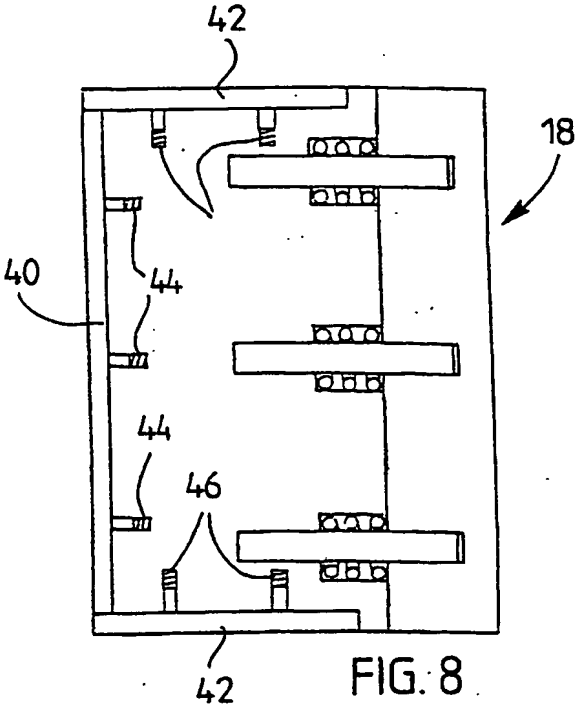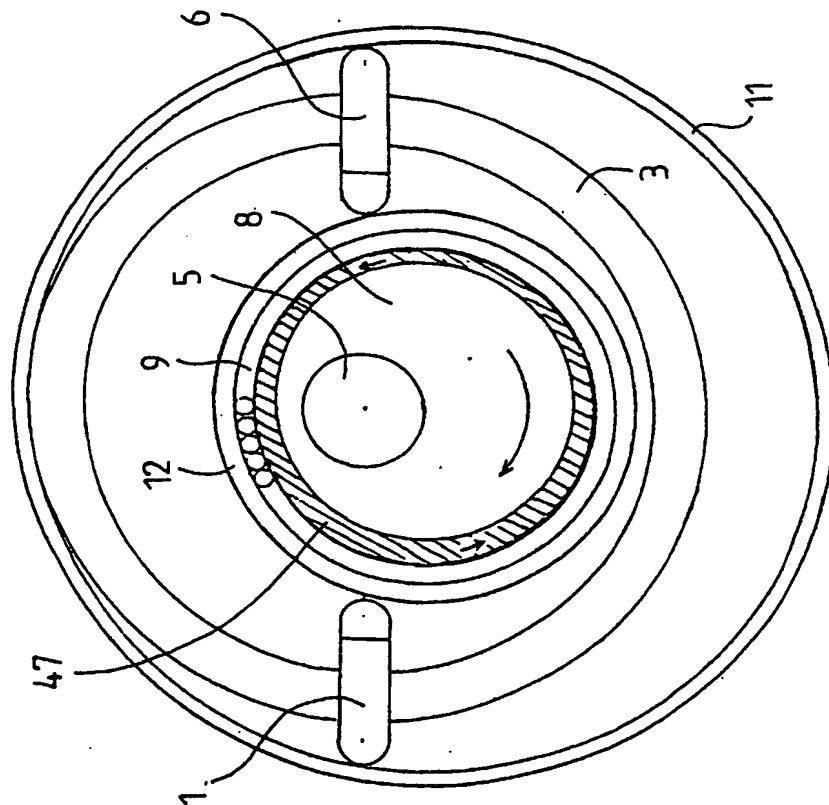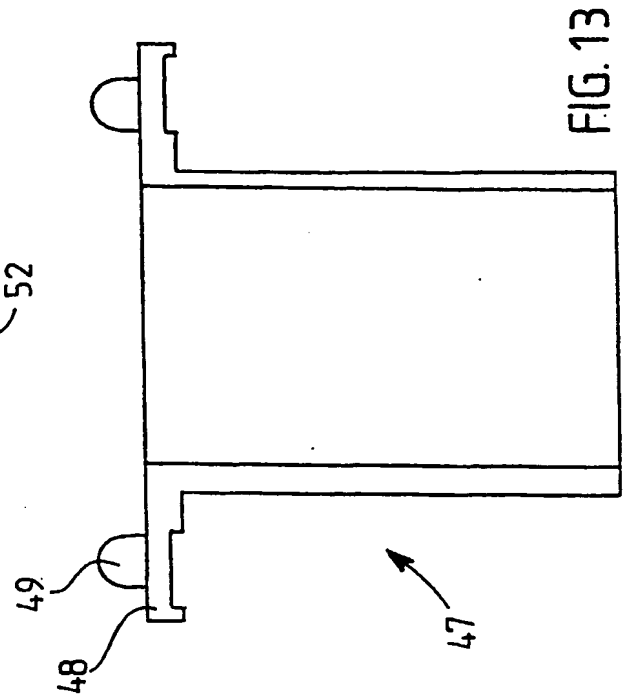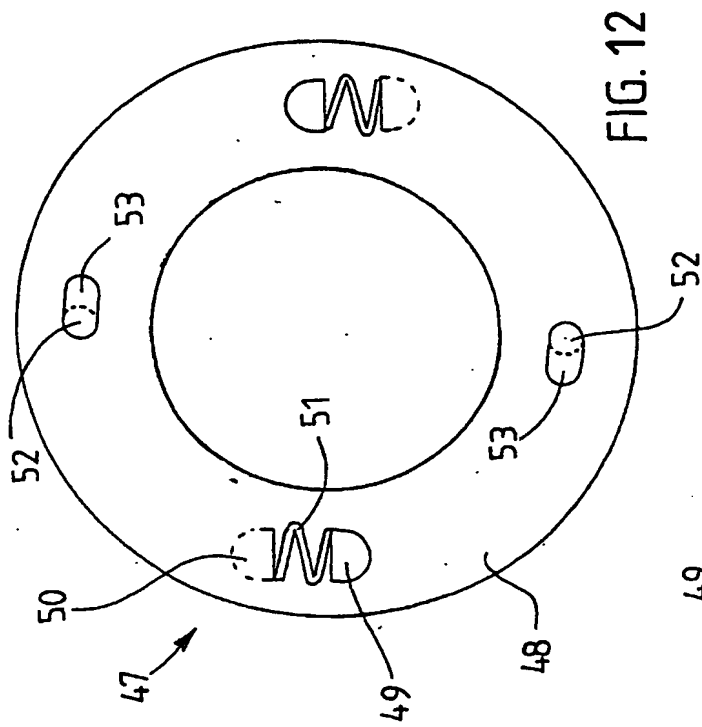

7/11



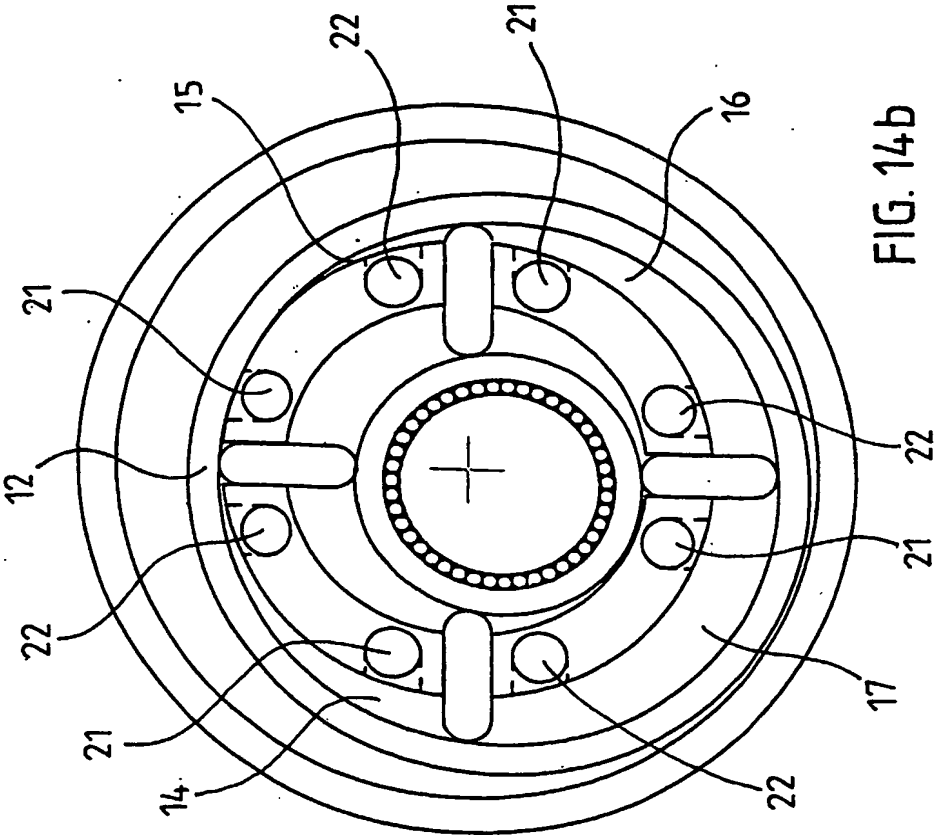


FIG. 14b

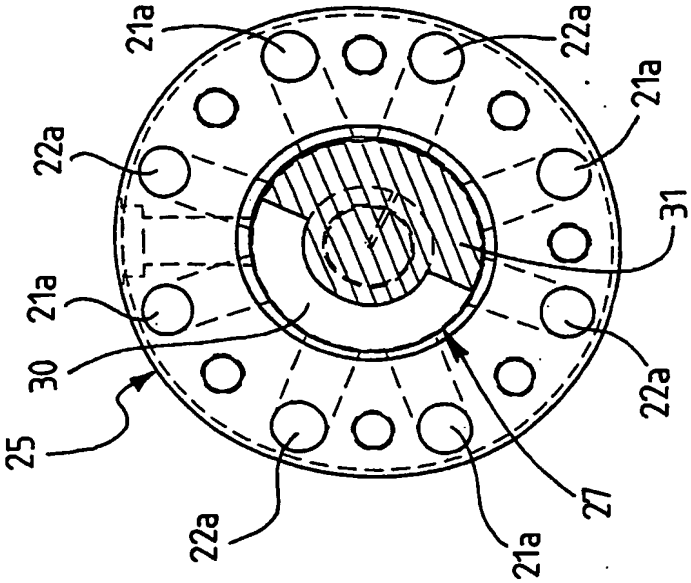


FIG. 14a

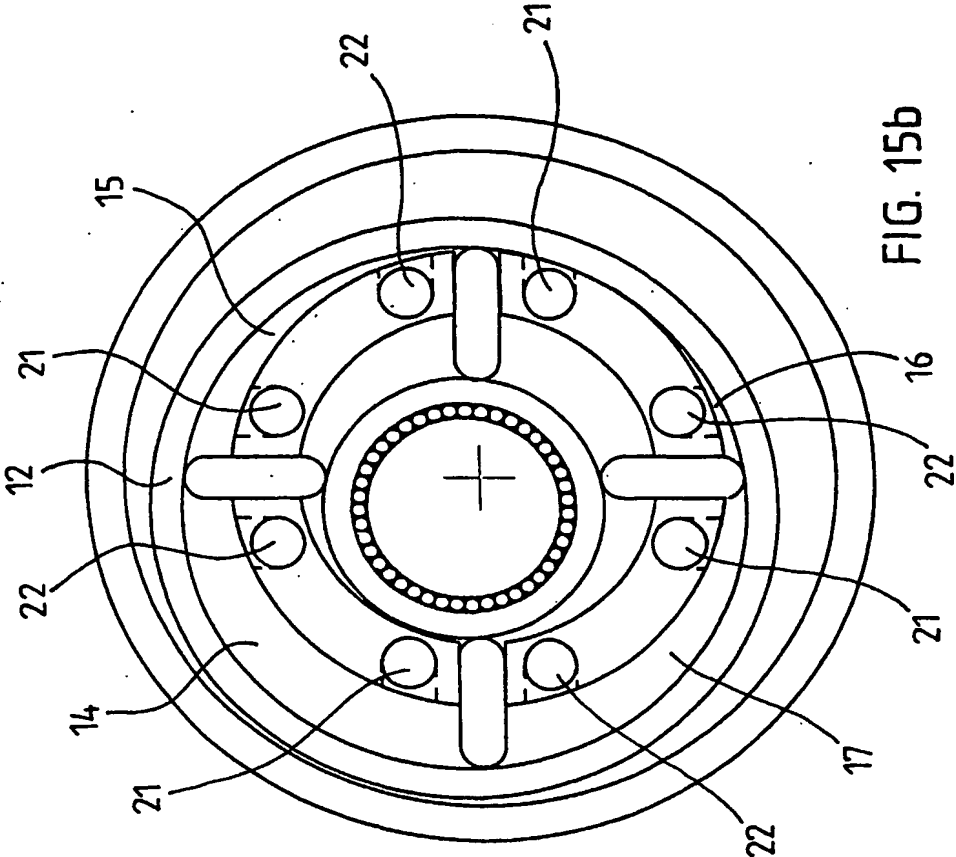


FIG. 15b

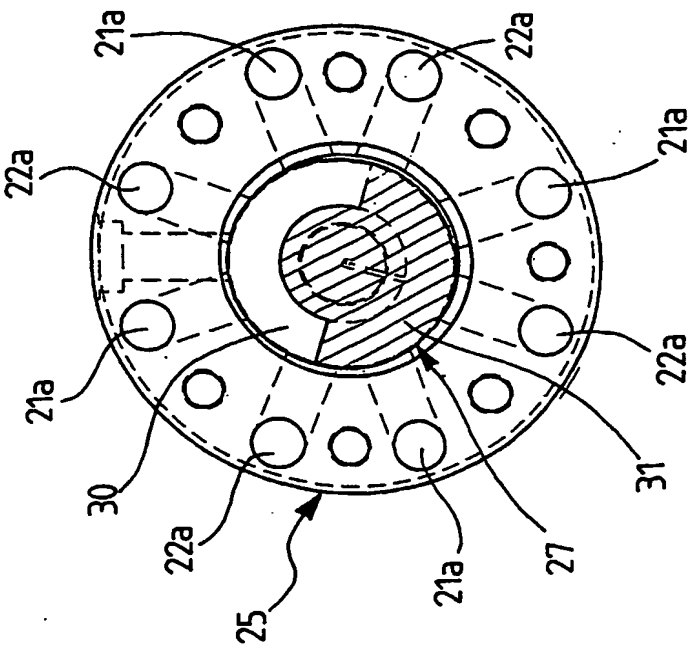


FIG. 15a

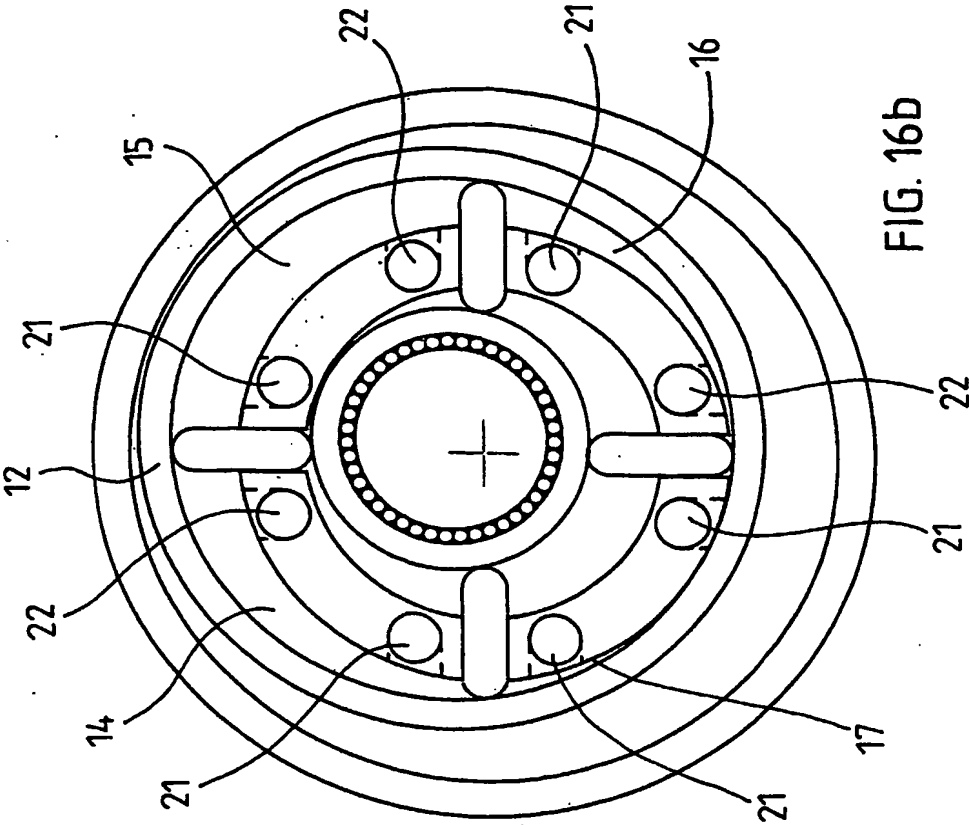


FIG. 16b

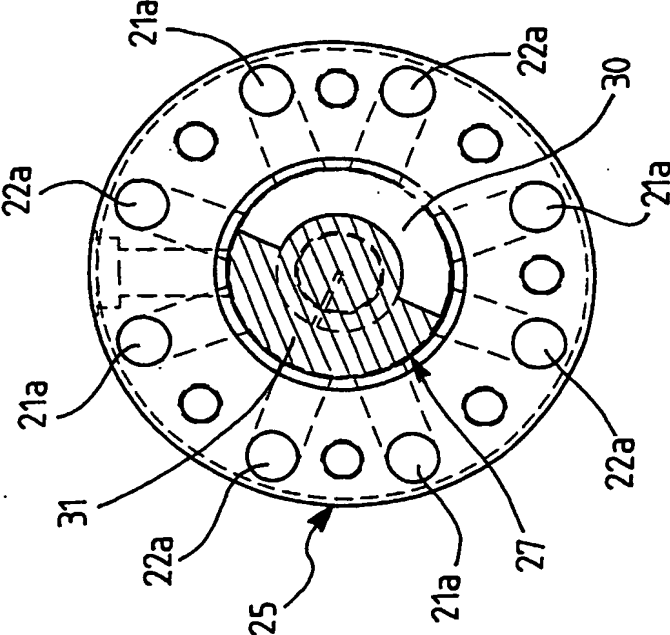


FIG. 16a

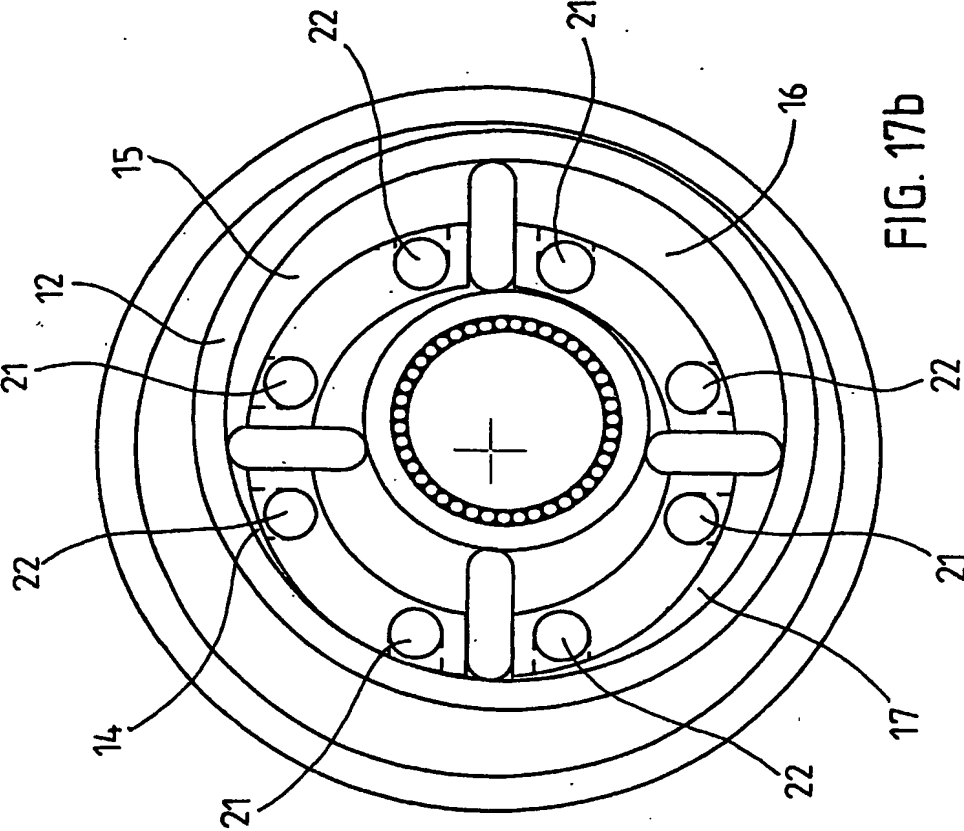


FIG. 17b

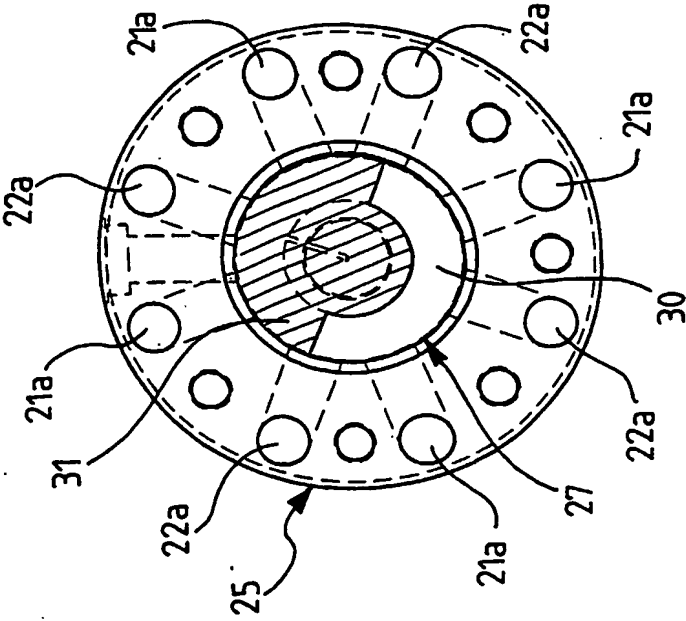


FIG. 17a

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 03/00314

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: F01C 1/344, F01C 21/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: F01C, F04C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 447701 C (R.J.P.E. COZETTE), 27 July 1927 (27.07.27), figure 1 --	1,2,4
X	DE 20113784 U1 (IAV GMBH INGENIEURGESELLSCHAFT AUTO UND VERKEHR), 8 May 2002 (08.05.02), figure 1 --	1,2
X	US 2366765 A (S.F. ANDERSON), 9 January 1945 (09.01.45), figure 2 --	1,2
X	US 2581172 A (R.H. CARSON), 1 January 1952 (01.01.52), figure 5 --	1,2

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

8 July 2003

Date of mailing of the international search report

09 -07- 2003

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Lena Nilsson / MRo
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 03/00314

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3539281 A (L. KRAMER), 10 November 1970 (10.11.70), figure 1 --	1,2
X	US 5558511 A (L.G. HEDELIN), 24 Sept 1996 (24.09.96), figure 2 --	1,2
X	US 2001055538 A1 (W. SCHNEIDER ET AL), 27 December 2001 (27.12.01) -- -----	1,2

INTERNATIONAL SEARCH REPORT

Information on patent family members

29/06/03

International application No.

PCT/FI 03/00314

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
DE	447701	C	27/07/27	NONE		
DE	20113784	U1	08/05/02	NONE		
US	2366765	A	09/01/45	NONE		
US	2581172	A	01/01/52	NONE		
US	3539281	A	10/11/70	BE	736416 A	31/12/69
				DE	1936492 A	22/01/70
				FR	2014685 A	17/04/70
				GB	1215667 A	16/12/70
US	5558511	A	24/09/96	AU	680208 B	24/07/97
				AU	5346394 A	09/05/94
				BR	9307238 A	24/08/99
				DE	69329469 D,T	23/05/01
				EP	0682740 A,B	22/11/95
				SE	0682740 T3	
				JP	8503045 T	02/04/96
				SE	9203034 A	16/04/94
				WO	9409260 A	28/04/94
				SE	9300841 D	00/00/00
US	2001055538	A1	27/12/01	DE	10008407 A	02/08/01
				EP	1118773 A	25/07/01

PATENT COOPERATION TREATY

PCT

REC'D 14 JUL 2004

WIPO

PCT

INTERNATIONAL PRELIMINARY REPORT ON PATENTABILITY
(Chapter II of the Patent Cooperation Treaty)

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference 2020571PC/ko	FOR FURTHER ACTION See Form PCT/IPEA/416	
International application No. PCT/FI2003/000314	International filing date (day/month/year) 17.04.2003	Priority date (day/month/year) 24.04.2002
International Patent Classification (IPC) or national classification and IPC F01C 1/344, F01C 21/08		
Applicant Viitamäki, Tapio		

- This report is the international preliminary examination report, established by this International Preliminary Examining Authority under Article 35 and transmitted to the applicant according to Article 36.
- This REPORT consists of a total of 4 sheets, including this cover sheet.
- This report is also accompanied by ANNEXES, comprising:
 - ☐ (sent to the applicant and to the International Bureau) a total of _____ sheets, as follows:
 - ☐ sheets of the description, claims and/or drawings which have been amended and are the basis of this report and/or sheets containing rectifications authorized by this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions).
 - ☐ sheets which supersede earlier sheets, but which this Authority considers contain an amendment that goes beyond the disclosure in the international application as filed, as indicated in item 4 of Box No. I and the Supplemental Box.
 - ☐ (sent to the International Bureau only) a total of (indicate type and number of electronic carrier(s)) _____, containing a sequence listing and/or tables related thereto, in computer readable form only, as indicated in the Supplemental Box Relating to Sequence Listing (see Section 802 of the Administrative Instructions).

4. This report contains indications relating to the following items:

- | | | |
|-------------------------------------|--------------|---|
| <input checked="" type="checkbox"/> | Box No. I | Basis of the report |
| <input type="checkbox"/> | Box No. II | Priority |
| <input type="checkbox"/> | Box No. III | Non-establishment of opinion with regard to novelty, inventive step and industrial applicability |
| <input type="checkbox"/> | Box No. IV | Lack of unity of invention |
| <input checked="" type="checkbox"/> | Box No. V | Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement |
| <input type="checkbox"/> | Box No. VI | Certain documents cited |
| <input checked="" type="checkbox"/> | Box No. VII | Certain defects in the international application |
| <input type="checkbox"/> | Box No. VIII | Certain observations on the international application |

Date of submission of the demand 14.11.2003	Date of completion of this report 06.07.2004
Name and mailing address of the IPEA/SE Patent- och registreringsverket Box 5055 S-102 42 STOCKHOLM Facsimile No. +46 8 667 72 88	Authorized officer Lena Nilsson / JA A Telephone No. +46 8 782 25 00

INTERNATIONAL PRELIMINARY REPORT ON PATENTABILITY

International application No.

PCT/FI2003/000314

Box No. I Basis of the report

1. With regard to the language, this report is based on the international application in the language in which it was filed, unless otherwise indicated under this item.

- ☐ This report is based on a translation from the original language into the following language _____, which is the language of a translation furnished for the purposes of:
- ☐ international search (under Rules 12.3 and 23.1(b))
 - ☐ publication of the international application (under Rule 12.4)
 - ☐ international preliminary examination (under Rules 55.2 and/or 55.3)

2. With regard to the elements of the international application, this report is based on *(replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report)*:

- ☒ the international application as originally filed/furnished
- ☐ the description:
- pages _____ as originally filed/furnished
- pages* _____ received by this Authority on _____
- pages* _____ received by this Authority on _____
- ☐ the claims:
- pages _____ as originally filed/furnished
- pages* _____ as amended (together with any statement) under Article 19
- pages* _____ received by this Authority on _____
- pages* _____ received by this Authority on _____
- ☐ the drawings:
- pages _____ as originally filed/furnished
- pages* _____ received by this Authority on _____
- pages* _____ received by this Authority on _____
- ☐ a sequence listing and/or any related table(s) – see Supplemental Box Relating to Sequence Listing.

3. ☐ The amendments have resulted in the cancellation of:

- ☐ the description, pages _____
- ☐ the claims, Nos. _____
- ☐ the drawings, sheets/figs _____
- ☐ the sequence listing (*specify*): _____
- ☐ any table(s) related to the sequence listing (*specify*): _____

4. ☐ This report has been established as if (some of) the amendments annexed to this report and listed below had not been made, since they have been considered to go beyond the disclosure as filed, as indicated in the Supplemental Box (Rule 70.2(c)).

- ☐ the description, pages _____
- ☐ the claims, Nos. _____
- ☐ the drawings, sheets/figs _____
- ☐ the sequence listing (*specify*): _____
- ☐ any table(s) related to the sequence listing (*specify*): _____

* If item 4 applies, some or all of those sheets may be marked "superseded."

INTERNATIONAL PRELIMINARY REPORT ON PATENTABILITY

International application No.

PCT/FI2003/000314

Box No. V Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. Statement

Novelty (N)	Claims	<u>1-6</u>	YES
	Claims		NO
Inventive step (IS)	Claims	<u>1-6</u>	YES
	Claims		NO
Industrial applicability (IA)	Claims	<u>1-6</u>	YES
	Claims		NO

2. Citations and explanations (Rule 70.7)

US, A, 3539281 and US, A, 5558511 both describes machines in which the rotors rotate. In the present invention, a "rotor" consists of two interconnected eccentric rings which only perform non-rotating eccentric motion. The surface of the "rotor" of the device according to the invention does not move in relation to the surface of the "rotor chamber" (i.e. it is not in friction contact nor in sliding contact) but only the contact point between them proceeds as a result of the eccentric motion. This cannot be found in any of the cited documents.

In US, A, 3539281, the rotor rotates as appears from column 2, lines 33 to 34; lines 38-41; lines 54 to 57 and column 3, lines 12-14.

From US, A, 5558511 is known a one-piece rotating eccentric rotor. The mounting with bearings of the eccentric part and the inner eccentric ring of the present invention is not known from said document.

DE, C, 447701 discloses an eccentric pump with a rotating rotor.

None of the documents cited in the International Search Report reveals a hydraulic motor according to claims 1-6. There is no information in the prior art that would lead a person skilled in the art to the claimed invention. Therefore, claims 1-6 are considered to meet the criteria of novelty and inventive step. The invention is industrial applicable.

INTERNATIONAL PRELIMINARY REPORT ON PATENTABILITY

International application No.


PCT/FI2003/000314

Box No. VII Certain defects in the international application

The following defects in the form or contents of the international application have been noted:

In claim 1, line 24 the expression "entity" probably should be changed to "unit".

Original (for SUBMISSION) - printed on 05.04.2003 10:52:09 AM

		<p>I hereby acknowledge the duty to disclose information that is known by me to be material to patentability as defined by 37 C.F.R. § 1.56, including for continuation-in-part applications, material information which became available between the filing date of the prior application and the PCT international filing date of the continuation-in-part application.</p> <p>I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.</p>
VIII-4-1 -1-1	Name:	VIITAMÄKI, Tapio
VIII-4-1 -1-2	Residence: (city and either US State, if applicable, or country)	Koskenkorva, Finland
VIII-4-1 -1-3	Mailing address:	Lipastinkuja 12
VIII-4-1 -1-4	Citizenship:	FI
VIII-4-1 -1-5	Inventor's Signature: (if not contained in the request, or if declaration is corrected or added under Rule 26ter after the filing of the international application. The signature must be that of the inventor, not that of the agent)	 20.05.2003
VIII-4-1 -1-6	Date: (of signature which is not contained in the request, or of the declaration that is corrected or added under Rule 26ter after the filing of the international application)	

Original (for SUBMISSION) - printed on 05.04.2003 10:52:09 AM

VIII-4-1	<p>Declaration: Inventorship (only for the purposes of the designation of the United States of America) Declaration of inventorship (Rules 4.17(iv) and 51bis.1(a)(iv)) for the purposes of the designation of the United States of America:</p>	<p>I hereby declare that I believe I am the original, first and sole (if only one inventor is listed below) or joint (if more than one inventor is listed below) inventor of the subject matter which is claimed and for which a patent is sought.</p> <p>This declaration is directed to international application No. PCT/FI03/00314 (if furnishing declaration pursuant to Rule 26ter)</p> <p>I hereby declare that my residence, mailing address, and citizenship are as stated next to my name.</p> <p>I hereby state that I have reviewed and understand the contents of the above-identified international application, including the claims of said application. I have identified in the request of said application, in compliance with PCT Rule 4.10, any claim to foreign priority, and I have identified below, under the heading "Prior Applications," by application number, country or Member of the World Trade Organization, day, month and year of filing, any application for a patent or inventor's certificate filed in a country other than the United States of America, including any PCT international application designating at least one country other than the United States of America, having a filing date before that of the application on which foreign priority is claimed.</p>
VIII-4-1 -1	Prior applications:	20020793, FI, 24 April 2002 (24.04.2002)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.